



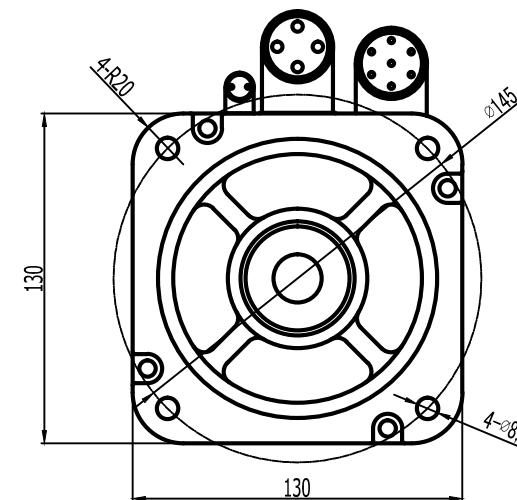



Rated Voltage (Vac)	200-220
Rated Power (w)	1300
Rated Torque (N.m)	8.4
Peak Torque (N.m)	25.2
Rated Speed (rpm)	1500
Peak Speed (rpm)	3000
Rated Current (Amp)	9.5
Peak Current (Amp)	28.5
Torque Const (N.m/Amp)	0.88
Back EMF Const (V/krpm)	62.5
Resistance (Ω)	0.56±10%
Inductance (mH)	3.4±20%
Inertia (kg*m ² *10 ⁻⁴)	22.26
Poles	10
Encoder type	23bit absolute
IP rating	IP65
Mass (Kg)	9.9

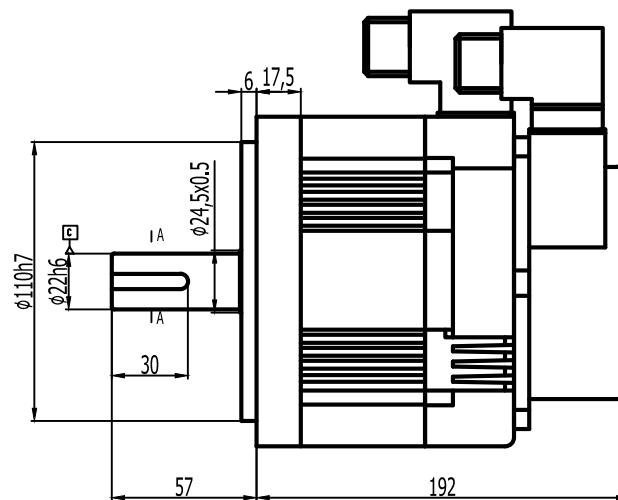

Wiring details of Brake cable connector		
Pos	1	2
Signal	0V	24V



Wiring details of Power cable connector				
Pos	1	2	3	4
Signal	PE	U	V	W



Wiring details of encoder cable connector							
Pos	1	2	3	4	5	6	7
Signal	PE	BAT+	BAT-	SD-	0V	SD+	5V

Connector Code Of Extension Cable Side			
Type	Winding Connector	Encoder Connector	Brake Connector
Connector	SC-HM23-4P	SC-HM23-7P	SC-HM23-2G

Connector Code Of Motor Side			
Type	Winding Connector	Encoder Connector	Brake Connector
Connector	SC-HM23-4S	SC-HM23-7S	SC-HM23-2S

Leadshine Technology Co .Ltd

ELM2H-1300LD130E-HD

130mm , high inertia , 1300w servo motor
23bit multi-turn absolute encoder , brake

www.leadshine.com