



Component Instruction

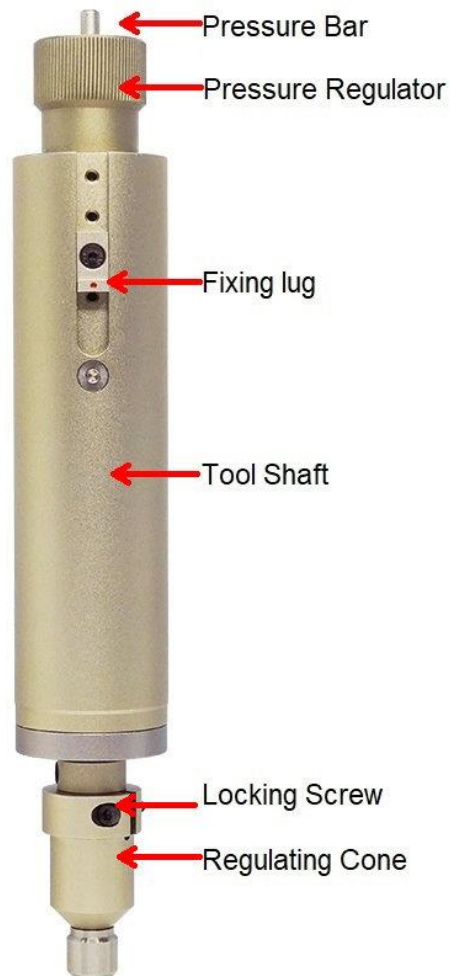


Pressure Bar: Press down to push-out knife
Pressure Regulator: for regulating the down pressure
Fixing Lug: for locking the tool shaft
Tool Shaft: main body of kiss-cut tool
Locking Screw: for fixing the adjusting cone
Regulating Cone: for adjusting the knife cutting depth

Reference Number	KCT91115
Max Cutting Thickness	<2mm
Dimension	W49*H257*D40mm
Weight	0.5Kg

KCT91115 Outline Dimension

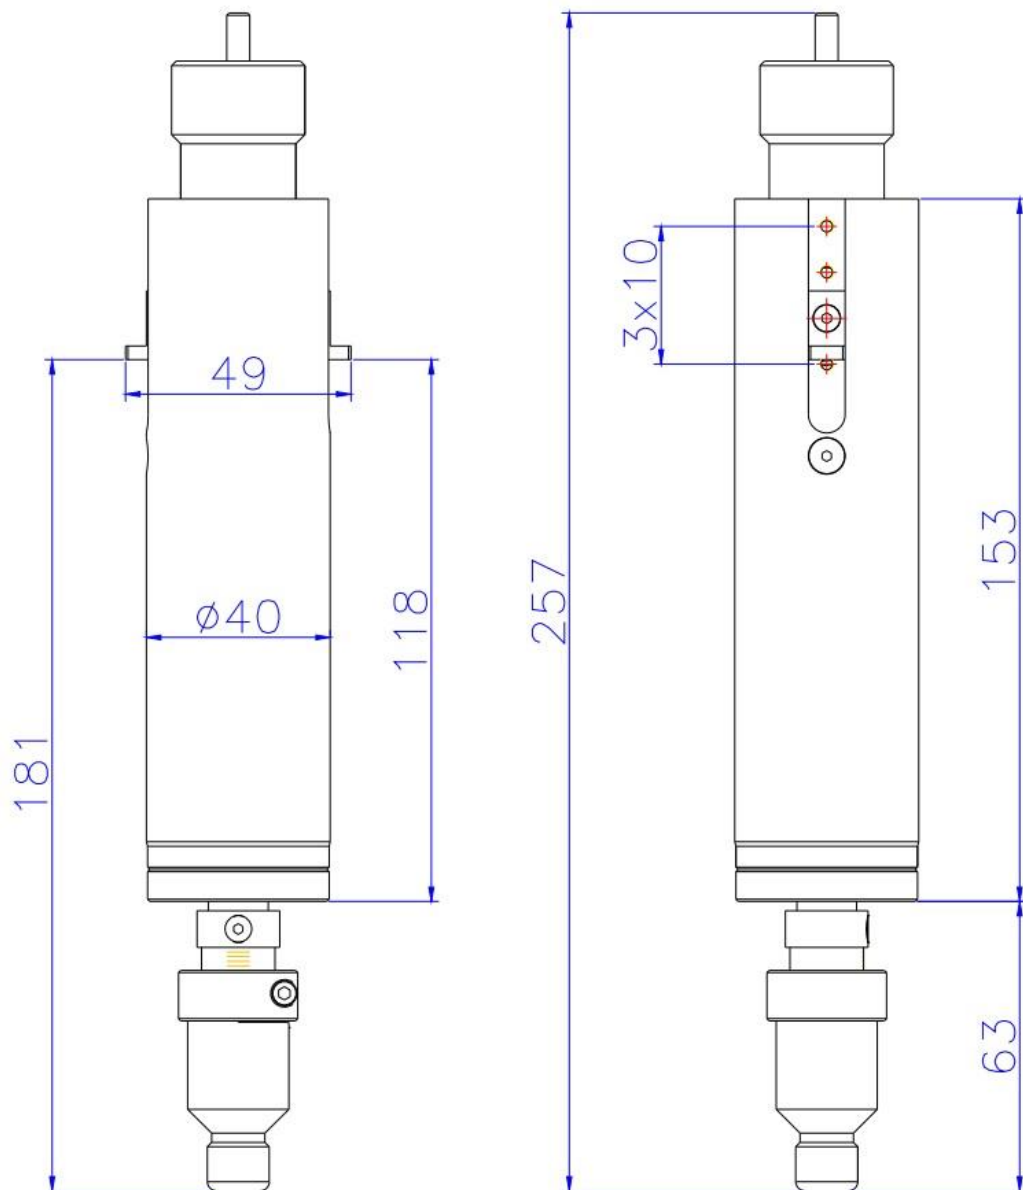

Installation

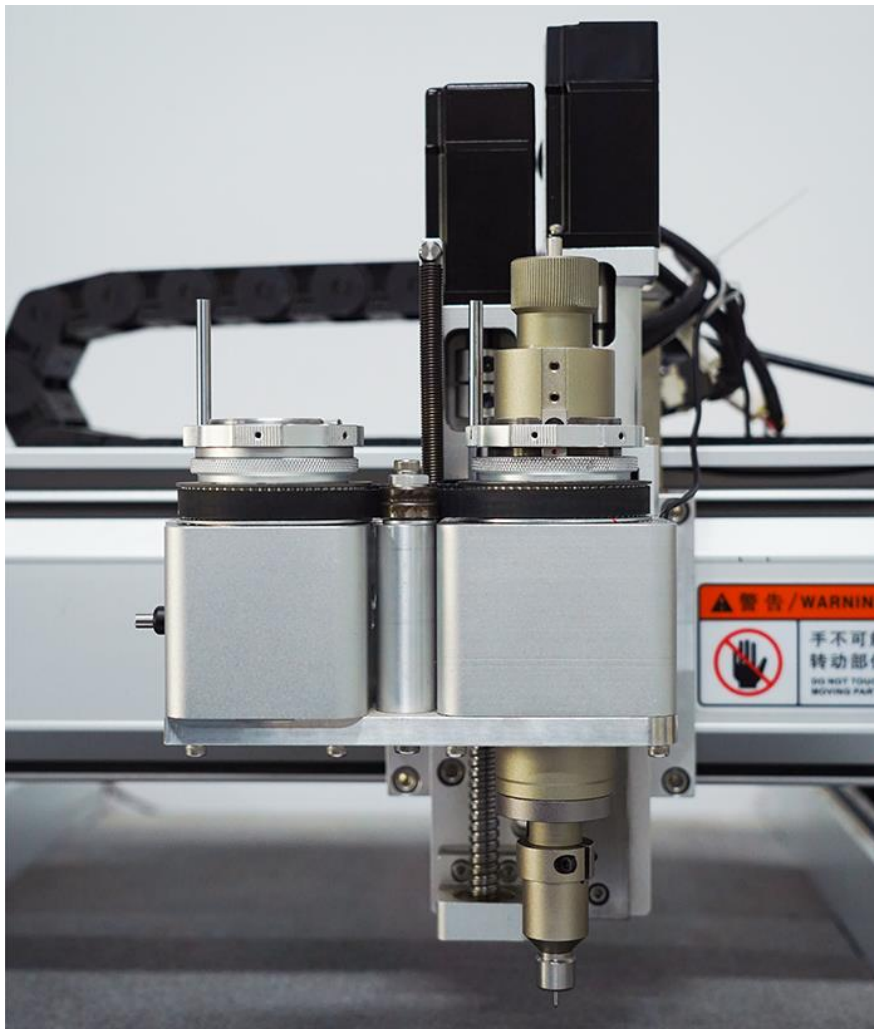

Install & dismantle the Knife Blade

Make the Kiss-cut blade aim to the insert hole, and make a tiny push the knife blade will be magnetically mounted.




Press down the bar on the top will push-out the knife blade.



Adjust the knife blade cutting depth

Lose the locking screw, rotate the cone to get a needed length then lock the screw.

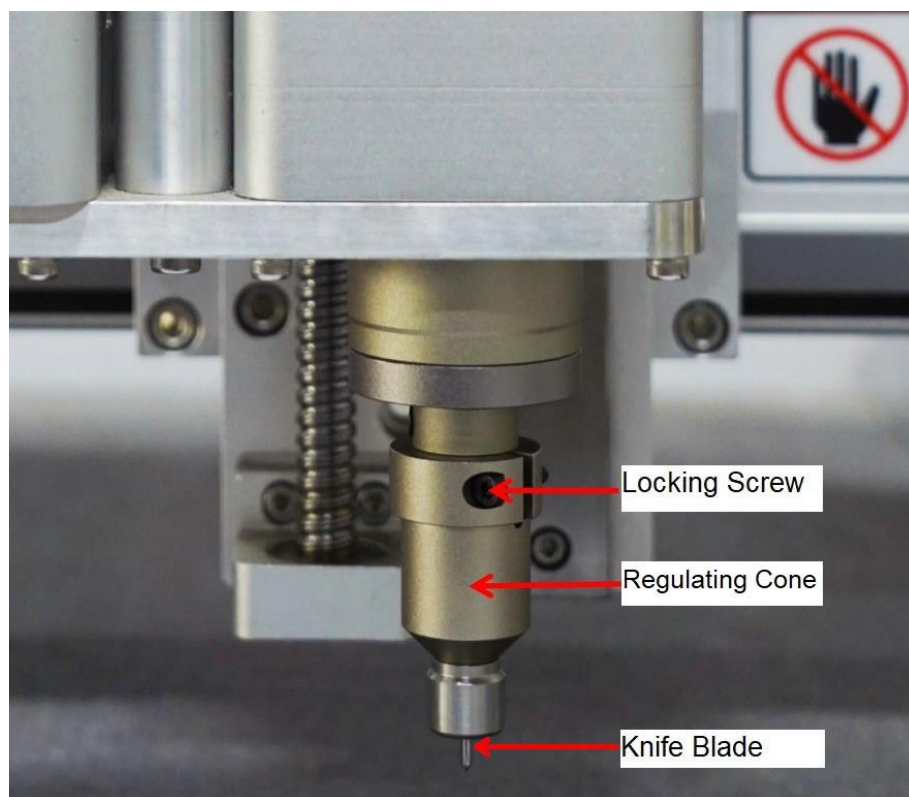

Adjust cutting down pressure

Move the regulating handle to the adjust pressure



NOTE

1. Please do not disassemble the kiss-cut tool.
2. Please do not press down the top bar during cutting work.